



# IPv6 Deployment WW & in .be


Eric Vyncke

IPv6 Council

[Eric.Vyncke@ipv6council.be](mailto:Eric.Vyncke@ipv6council.be)




# IPv6 in the World

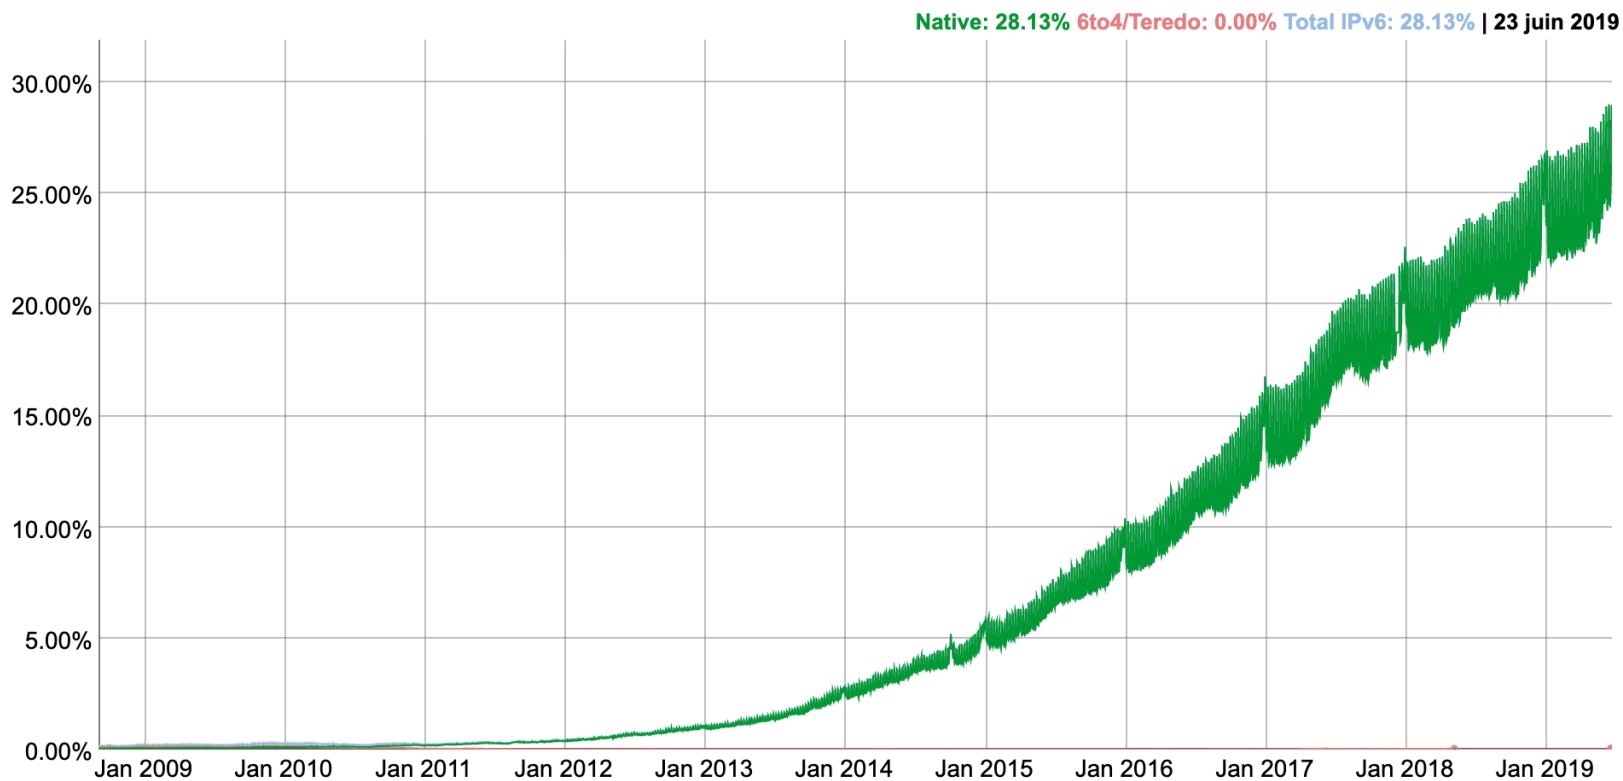


© 2019 Cisco and/or its affiliates. All rights reserved. Cisco Public

Source: <https://www.google.com/intl/en/ipv6/statistics.html>

IPv6 Penetration in Belgium as measured by Akamai, APnic and Google  
(2019-06-26) [www.vyncke.org/ipv6status](http://www.vyncke.org/ipv6status)

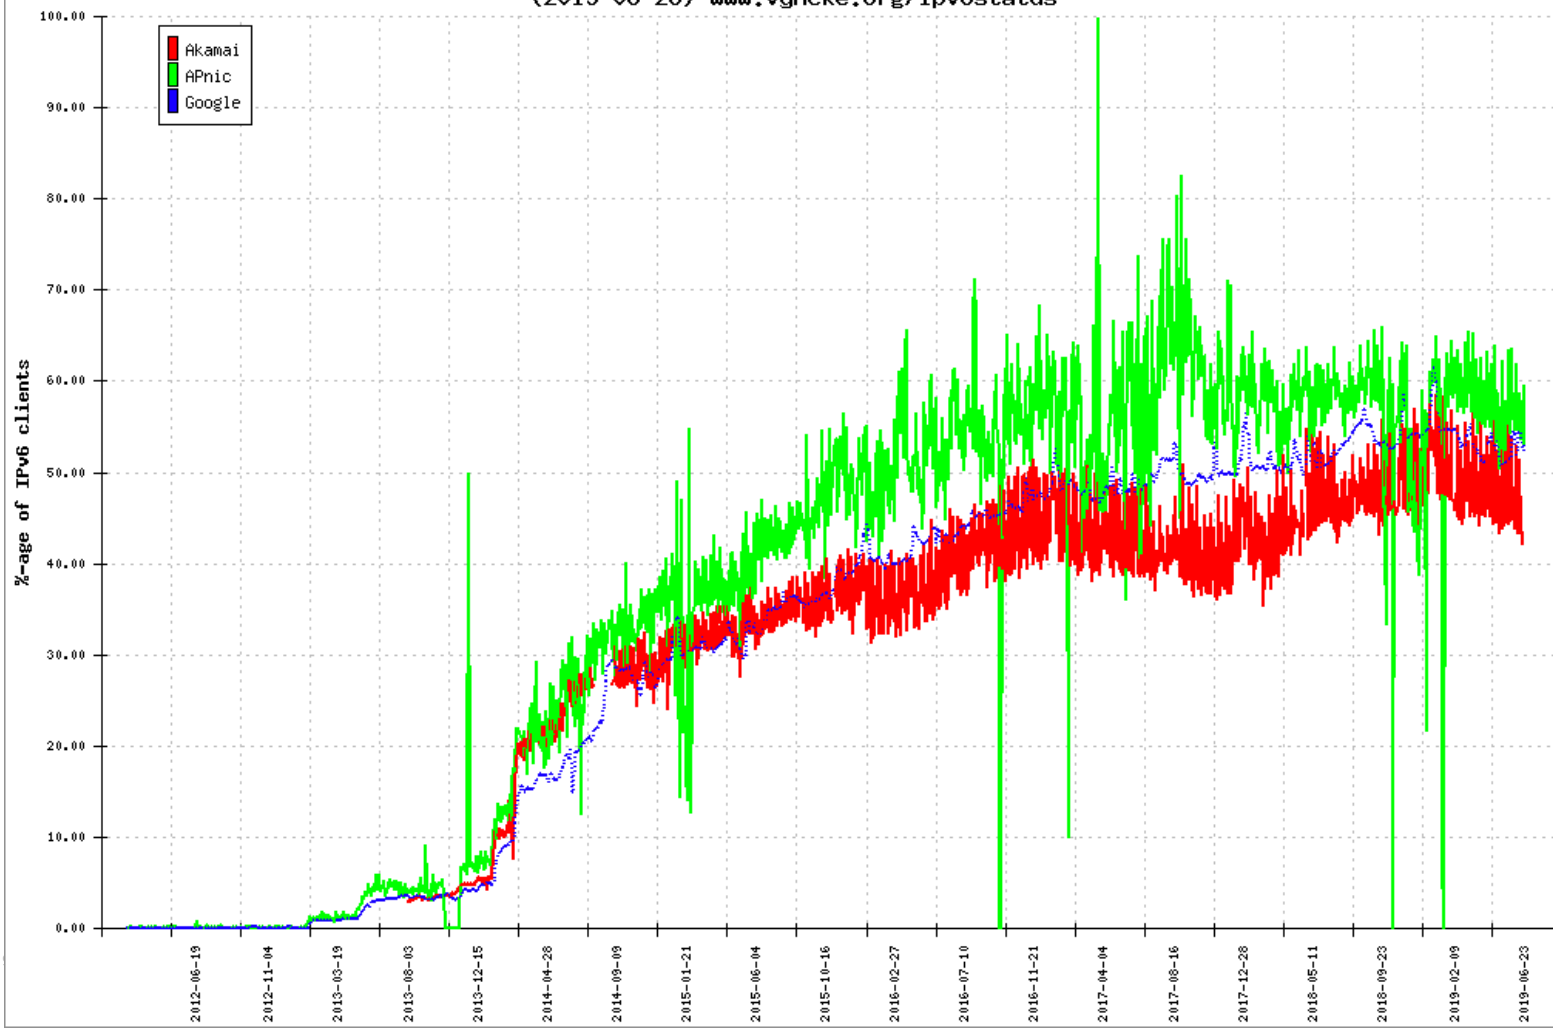


IPv6 Penetration in China as measured by Akamai, APNIC and Google  
(2019-06-26) [www.vyncke.org/ipv6status](http://www.vyncke.org/ipv6status)

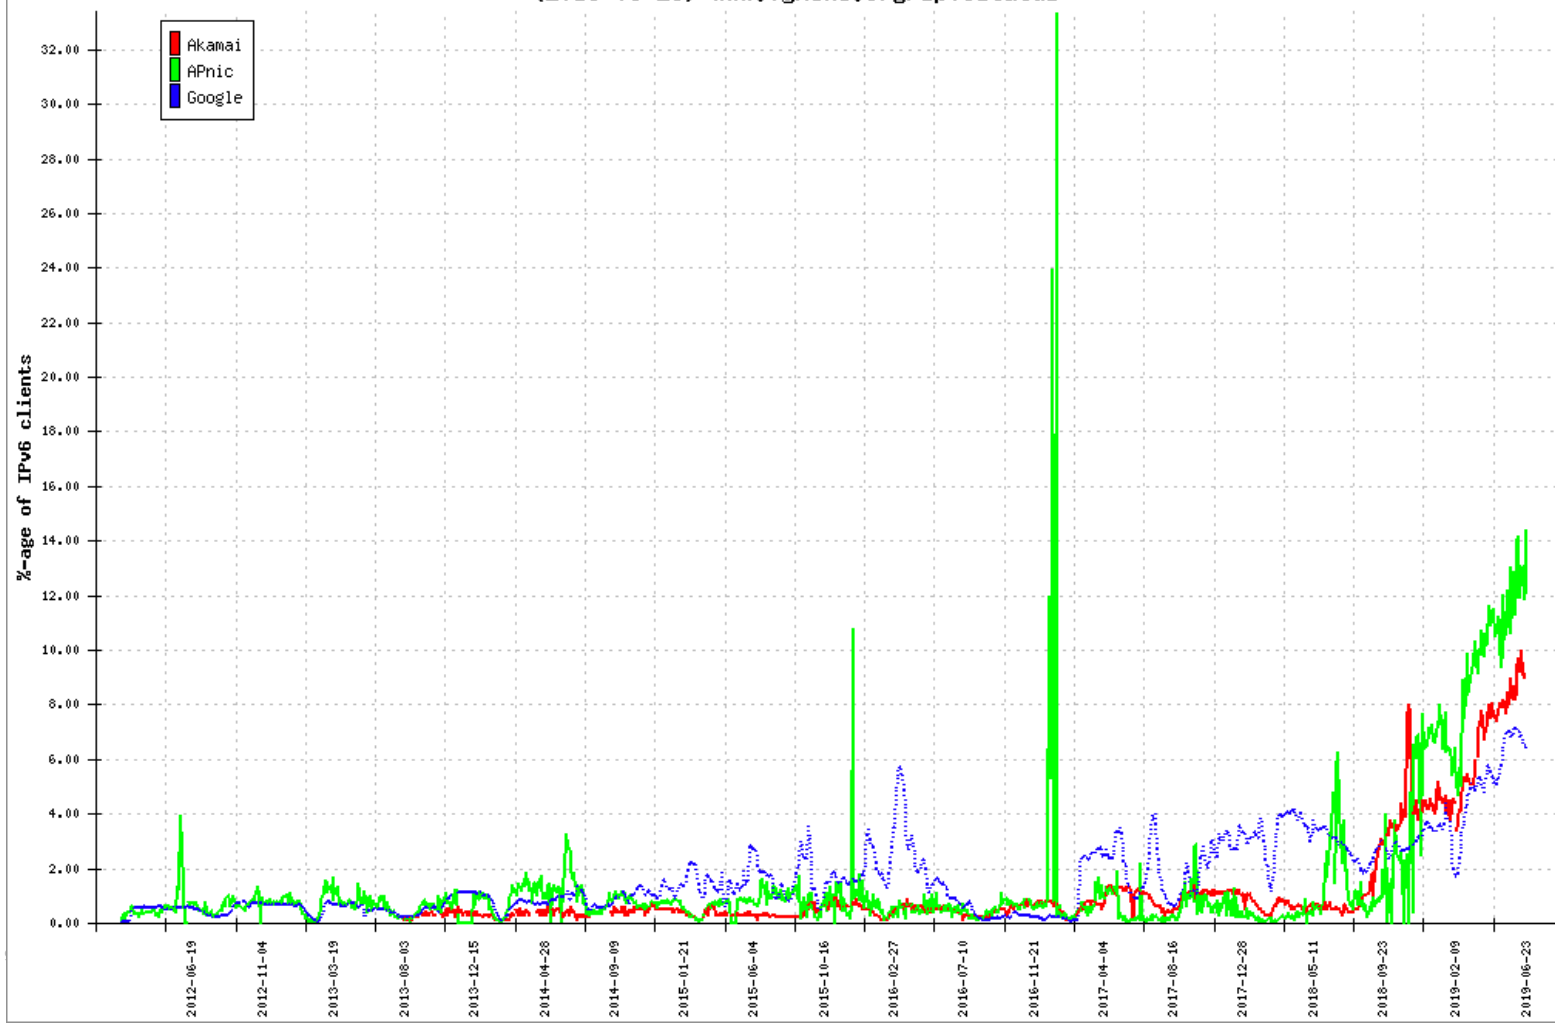





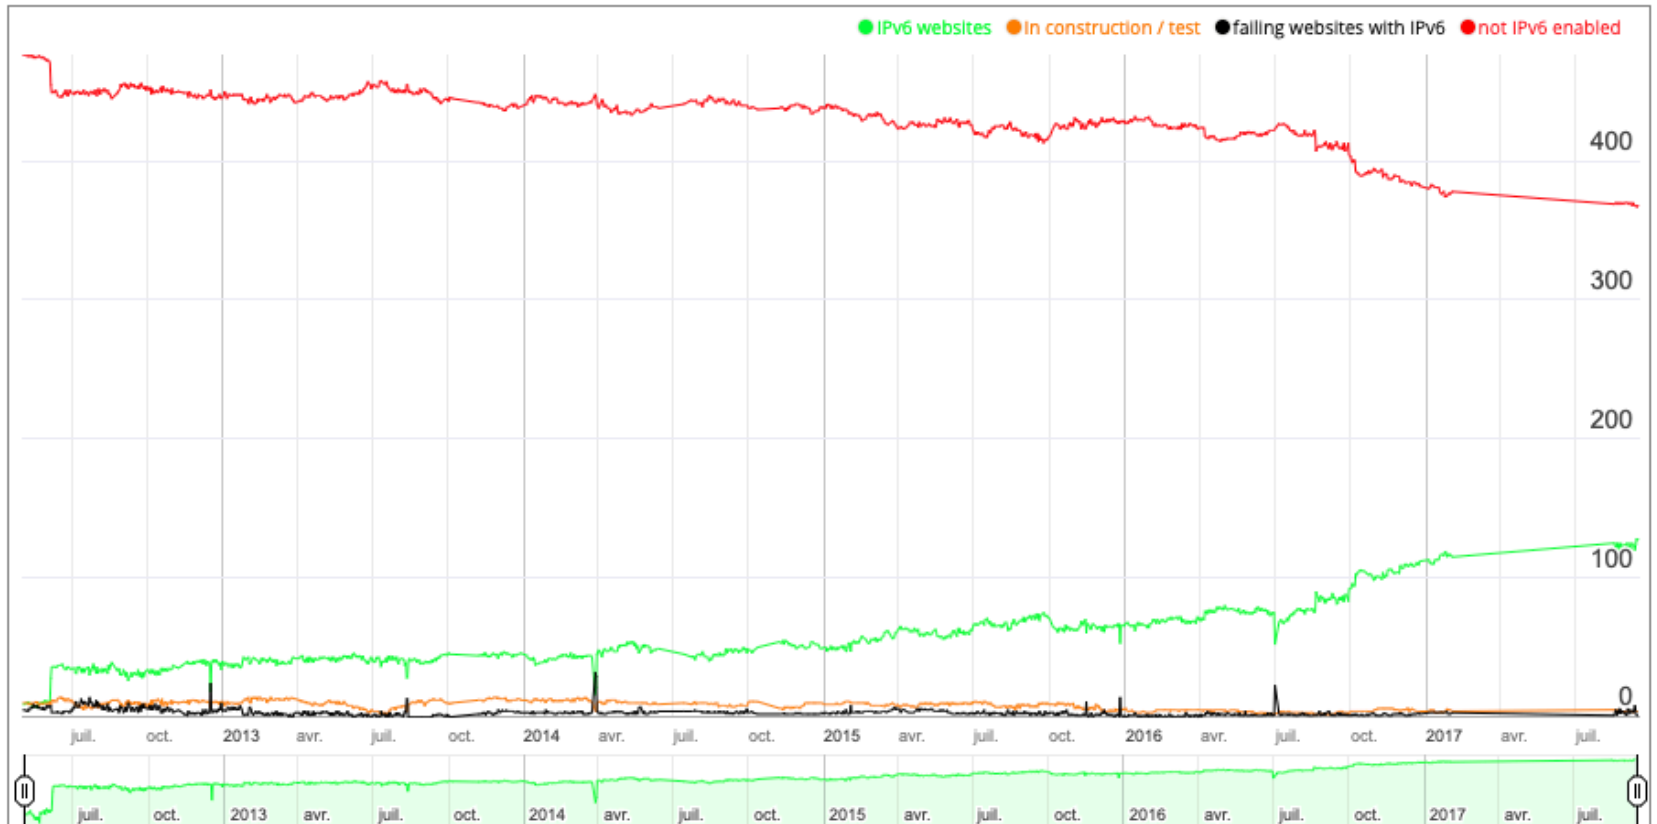

















# Belgium

Display Content Data ⓘ





Source: <https://6lab.cisco.com/stats/cible.php?country=BE&option=content>



Name	Alexa (Nov 2016) country/global	Web
 <a href="#">Search Google</a> <a href="#">whois</a>	1/658	<a href="#">www.google.be</a> <a href="#">2a00:1450:4007:805::2003</a> 2011-06-08
 <a href="#">twoo.com</a> <a href="#">whois</a>	2/2226	FAILED <i>CDN</i>
 <a href="#">Het Laatste Nieuws</a> <a href="#">whois</a>	3/2692	<a href="#">www.hln.be</a> <a href="#">2a02:26f0:9400:1bb::2286</a> 2016-09-09 <i>CDN</i>
 <a href="#">Radio Télévision Belge Francophone</a> <a href="#">whois</a>	4/4351	<a href="#">www.rtf.be</a> <a href="#">2a04:4c42:9::319</a> 2010-07-30 <i>CDN</i>
 <a href="#">Nieuwsblad</a> <a href="#">whois</a>	5/5218	FAILED
 <a href="#">2dehands.be</a> <a href="#">whois</a>	6/5272	FAILED
 <a href="#">2ememain.be</a> <a href="#">whois</a>	7/5979	FAILED
 <a href="#">tamilgun.be</a> <a href="#">whois</a>	8/6244	<a href="#">www.tamilgun.be</a> <a href="#">2606:4700:30::681f:47d3</a> 2019-06-19 <i>CDN</i>
 <a href="#">Katholieke Universiteit Leuven</a> <a href="#">whois</a>	9/6369	<a href="#">www.kuleuven.be</a> <a href="#">2a02:2c40:0:80::80:12</a> 2011-06-07
 <a href="#">belgium.be</a> <a href="#">whois</a>	10/7580	<a href="#">www.belgium.be</a> <a href="#">2a01:690:35:100::f5:f4</a> 2012-05-16
		<a href="#">www.vrt.be</a>






 <a href="#">Vlaamse Radio Televisie</a> <a href="#">whois</a>	11/7687	<a href="#">www.vrt.be</a> <a href="#">2600:9000:2007:f800:9:bd0:1600:93a1</a> 2018-09-27
 <a href="#">ugent.be</a> <a href="#">whois</a>	12/8655	FAILED
 <a href="#">La Dernière Heure</a> <a href="#">whois</a>	13/8872	FAILED
 <a href="#">Belgian Federal Government</a> <a href="#">whois</a>	14/9049	FAILED
 <a href="#">immoweb</a> <a href="#">whois</a>	15/9512	FAILED <i>CDN</i>
 <a href="#">Telenet</a> <a href="#">whois</a>	16/9700	<a href="#">ipv6.telenet.be</a> <a href="#">2a02:1800:120:6002::3</a> 2018-10-24
 <a href="#">coolblue.be</a> <a href="#">More whois</a>	17/10933	FAILED
 <a href="#">surfe.be</a> <a href="#">whois</a>	18/11102	<a href="#">www.surfe.be</a> <a href="#">2606:4700:30::6818:6ac9</a> 2016-10-12 <i>CDN</i>
 <a href="#">bnpparibasfortis.be</a> <a href="#">whois</a>	19/11123	FAILED
 <a href="#">De Standaard</a> <a href="#">whois</a>	20/11284	FAILED
 <a href="#">Le Soir</a> <a href="#">whois</a>	21/11343	<a href="#">www.lesoir.be</a> <a href="#">2a02:26f0:9400:1ac::3c11</a> 2015-06-26 <i>CDN</i>
 <a href="#">rtl.be</a> <a href="#">whois</a>	22/12072	FAILED



<https://www.vyncke.org/ipv6status/detailed.php?country=be>




# But also


 <b>B2C</b> <a href="#">immoweb</a> <small>whois</small>	15/9512	FAILED <i>CDN</i>
 <b>ISP</b> <a href="#">Telenet</a> <small>whois</small>	16/9700	AS19551 (INCAPSULA Incapsula.com) <a href="#">ipv6.teleng</a> <a href="#">2a02:1800::1</a> 2018-10-24


 <b>Bank</b> <a href="#">bnpparibasfortis.be</a> <small>whois</small>	19/11123	FAILED
 <b>Press</b> <a href="#">De Standaard</a> <small>whois</small>	20/11284	FAILED


 <b>Press</b> <a href="#">De Standaard</a> <small>whois</small>	20/11284	FAILED
 <b>Press</b> <a href="#">Le Soir</a> <small>whois</small>	21/11343	<a href="#">www.lesoir.be</a> <a href="#">2a02:26f0:9400:1ae::3c11</a> 2015-06-26 <i>CDN</i>
 <b>Press</b> <a href="#">rtl.be</a> <small>whois</small>	22/12072	FAILED
 <b>Press</b> <a href="#">sudinfo.be</a> <small>whois</small>	23/12249	<a href="#">www.sudinfo.be</a> <a href="#">2a02:26f0:2d:58c::3c1d</a> 2015-06-30 <i>CDN</i>
 <b>Press</b> <a href="#">lalibre.be</a> <small>whois</small>	24/13452	FAILED


 <b>vier.be</b> <small>whois</small>	33/16833	<a href="#">www.vier.be</a> <a href="#">2600:9000:2007:2e00:1e:83e1:5900:93a1</a> 2018-06-02
 <b>Press</b> <a href="#">vtm.be</a> <small>whois</small>	34/17122	<a href="#">www.vtm.be</a> <a href="#">2a02:26f0:2d:589::2fc6</a> 2019-01-05 <i>CDN</i>


 <b>rockwerchter.be</b> <small>whois</small>	112/62409	FAILED
 <b>Graspop</b> <small>whois</small>	113/63554	FAILED
 <b>graspop.be</b> <small>whois</small>	31/15908	<a href="#">www.graspop.be</a> <a href="#">2a02:5b41:4:407::4</a> 2018-12-13


 <b>zalando.be</b> <small>whois</small>	49/23328	<a href="#">zalando.be</a> <a href="#">2a02:cbf0:20:1:7b6b:4a32:5ee7:aebd</a> 2012-05-24 <i>CDN</i>
--	----------	---

 <b>Edu</b> <a href="#">Université de Louvain</a> <small>whois</small>	67/34399	FAILED
--	----------	--------


 <b>keytradebank.be</b> <small>whois</small>	302/144765	<a href="#">keytradebank.be</a> <a href="#">2a02:4b0:218:5::11</a> 2014-12-14
--	------------	---

 <b>ISP</b> <a href="#">Voo</a> <small>whois</small>	80/42025	<a href="#">ipv6.voo.be</a> <a href="#">2a02:2788:fff1::100</a> 2018-10-24
--	----------	--

 <b>deliveroo.be</b> <small>whois</small>	130/70027	<a href="#">www.deliveroo.be</a> <a href="#">2400:cb00:2048:1::6810:8f31</a> 2017-10-27 <i>CDN</i>
---	-----------	--

 <b>Gov</b> <a href="#">vlaanderen.be</a> <small>whois</small>	51/24107	<a href="#">www.vlaanderen.be</a> <a href="#">2a02:26f0:2d:194::3dfc</a> 2013-06-27 <i>CDN</i>
---	----------	--





# WHAT ARE THE IPV6 NEWS FROM THE IETF ?


Eric Vyncke, [evyncke@cisco.com](mailto:evyncke@cisco.com), [@evyncke](https://twitter.com/evyncke)  
Distinguished Engineer, Paris Innovation & Research Lab  
June 2019



# How is the IETF Organized?

Source <https://datatracker.ietf.org/meeting/103/materials/slides-103-edu-sessm-internet-area-overview-00>  
By Suresh Krishnan and Pascal Thubert


# Standards Developing Organizations (SDOs)

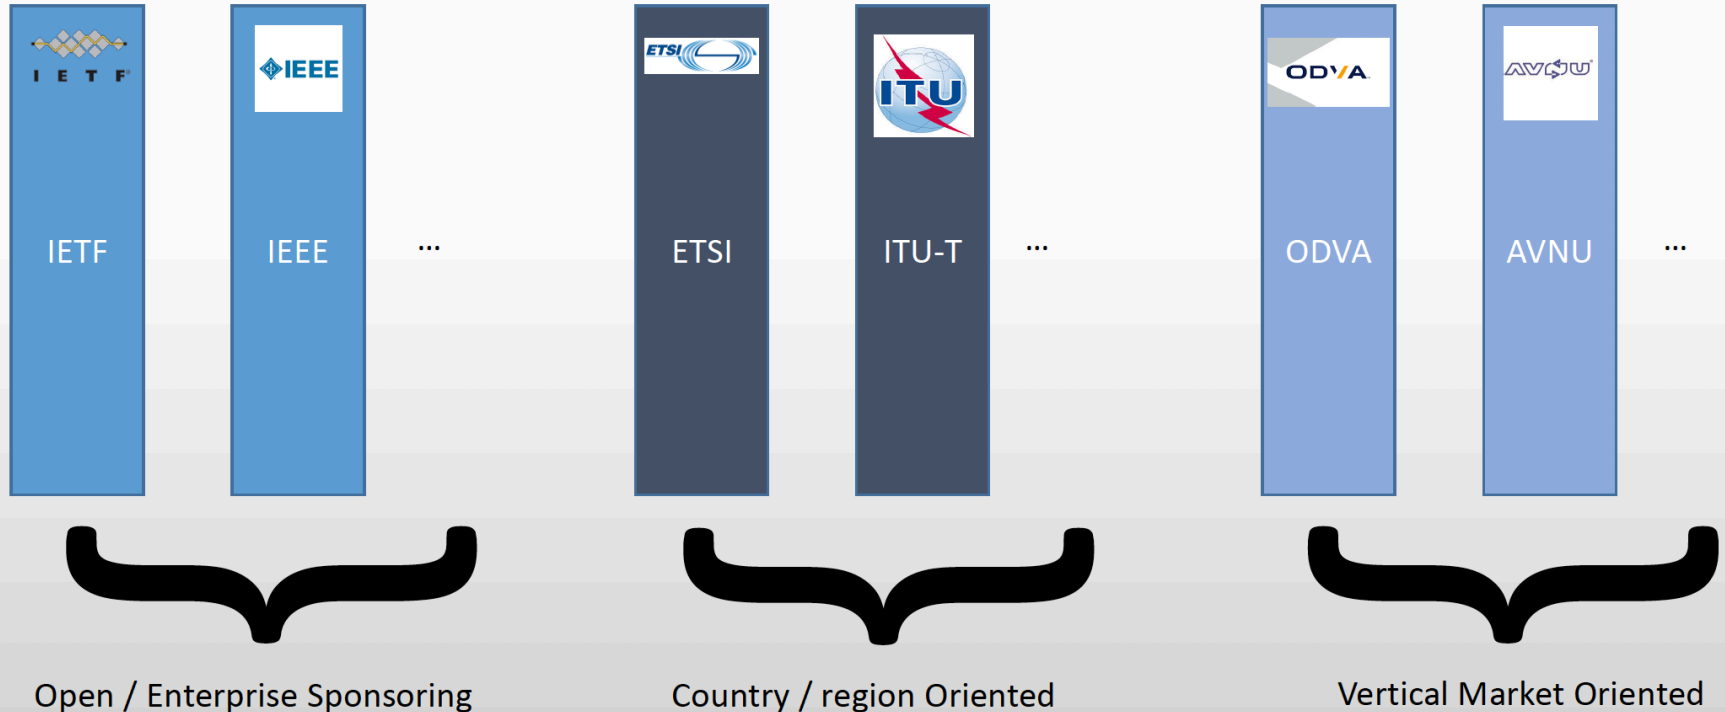


# The IETF is divided in Areas



Used to change often, very stable for the last 10+ years

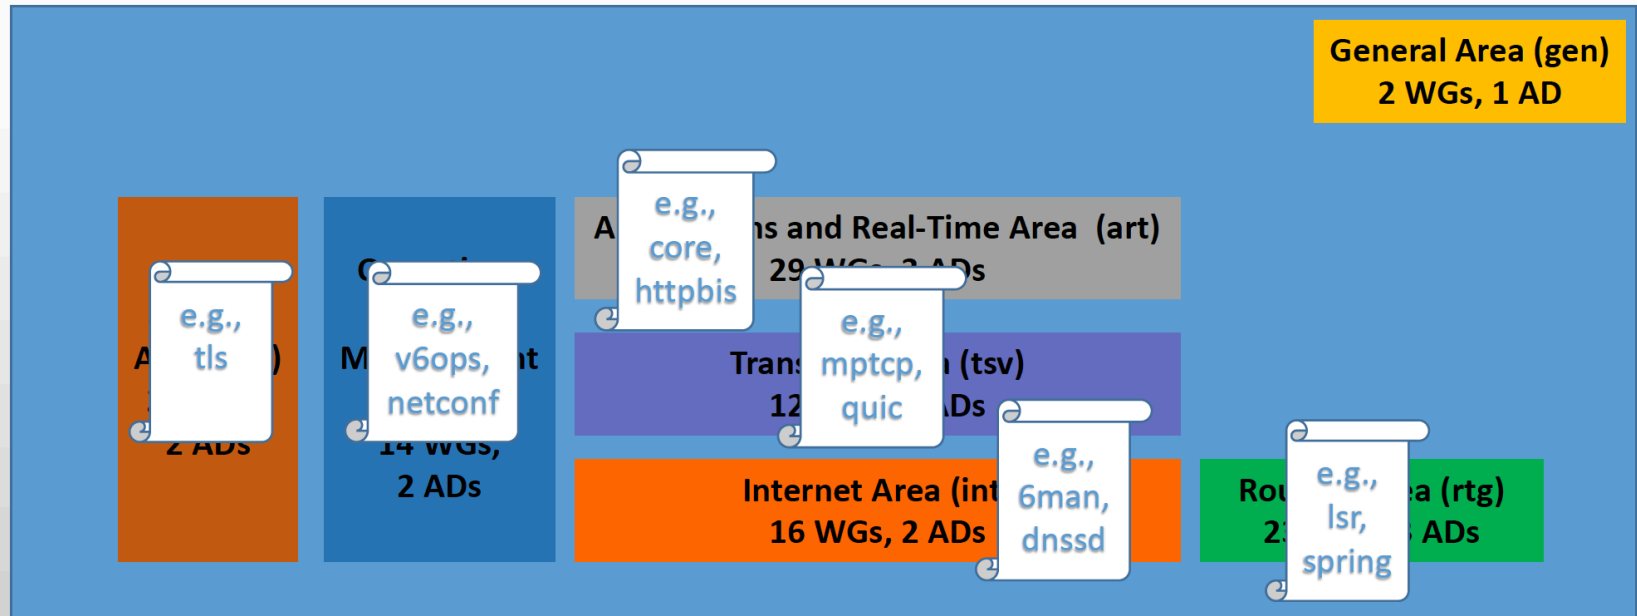



# IPv6-related Working Groups

Source <https://datatracker.ietf.org/meeting/103/materials/slides-103-edu-sessm-internet-area-overview-00>  
By Suresh Krishnan and Pascal Thubert

# 6MAN: IPv6 Maintenance

- Defines / controls the Evolution of IPv6
  - And prepare for IPv4 sunset
- It is the design authority for extensions and modifications to the IPv6 protocol
- Sociological dimension
  - Address Privacy
  - Freedom to form an address
- Political dimension
  - Conservationists care for a stable protocol to encourage deployments
  - Progressists want the protocol to **evolve**, else it dies (e.g., Segment Routing)

# 6lo and LPWAN

- Low Power Link layer crowds
  - BLE, BACNet, NFC, PowerLine, ZWave, 802.15.4, LoRaWAN, NB IOT, SIGFOX...
- IOT: new Internet use cases
  - Metering and Automation, Industrial Internet
- Redefining some classical operation
  - IPv6 ND
- Providing new solutions to
  - Fragmentation for small MTUs
  - Header Compression

# 6lo: IPv6 over Networks of Resource-constrained Nodes

- 6lo focuses on the work that facilitates IPv6 connectivity over constrained node networks
- Main areas of work:
  - IPv6-over-<link> adaptation layer specifications for link layer technologies used in constrained node networks
  - Information and data models (e.g., MIB modules, YANG models) for these adaptation layers
  - Common mechanisms such as low-complexity header compression, that are applicable to more than one adaptation layer specification



# LPWAN IPv6 over Low Power Wide-Area Network

- Focuses on enabling **IPv6** connectivity over the following selection of Low-Power Wide-Area technologies: SIGFOX, LoRa, WISUN and NB-IOT.

# 6tisch: IPv6 over the TSCH mode of IEEE 802.15.4e

- OK, do not panic 😊
- TSCH is Time Slotted Channel Hopping
  - See [https://en.wikipedia.org/wiki/Time\\_Slotted\\_Channel\\_Hopping](https://en.wikipedia.org/wiki/Time_Slotted_Channel_Hopping)
  - low-rate wireless personal area networks (LR-WPANs)
- The 6tisch working group works on defining IPv6 over TSCH in order to enable the further adoption of IPv6 in industrial standards
- Interaction with open source
  - WG tracks open source implementations and supports plugtests
  - F-interop

# IPWAVE: IP Wireless Access in Vehicular Environments

- V2V and V2I use-cases where IP is well-suited as a networking technology
  - develop **an IPv6-based solution** to establish direct and secure connectivity between a vehicle and other vehicles or stationary systems.
- Specify the mechanisms for transmission of **IPv6 datagrams** over IEEE 802.11-OCB mode.

# V6OPS: IPv6 Operations

- Operation crowd practicing the technology
  - Feeds back on the protocol in the real world
  - Produces Best Practice
- 
- When real world experience meets academics 😊
  - Really worth reading/learning from...

# Homenet

- This working group focuses on the evolving networking technology within and among relatively small residential networks
  - Designed to work on residential networks involving multiple routers and subnets
  - Mainly focused on **IPv6-based operations**
- Job is now mostly done

# Softwires

- Focuses on the specification of **IPv4-IPv6** transition and co-existence mechanisms that are based on encapsulation (i.e. tunneling)
  - Discovery, control and encapsulation methods for connecting IPv4 networks across IPv6 networks and vice versa
  - Implementation considerations for handling selection and use of one of these transition/co-existence solutions
- Job is mostly done

# DMM Distributed Mobility Management

- Distributed Mobility Management solutions for IP networks so that traffic between mobile and correspondent nodes can take an optimal route
- It is also chartered to work on maintenance and bug fixes of the specifications in the **Mobile IPv6** protocol family


# LWIG Light-Weight Implementation Guidance

- The LWIG working group focuses on collecting and documenting experiences from implementers of IP stacks in constrained devices
- implementation techniques for reducing complexity, memory footprint, or power usage
- IPv6 can be chatty...



# GIT GitHub Integration and Tooling

- Many IETF working groups use external code repository services, primarily GitHub, in managing their work
- It is about HOW to use github-like tools for RFC, ...
- It is NOT about github protocols
- Interesting when GitHub is IPv4-only ☹ ☹



# Recent IPv6 RFC

# Finally, IPv6 is a Standard

Internet Engineering Task Force (IETF)

Request for Comments: 8200

**STD: 86**

Obsoletes: 2460

Category: Standards Track

ISSN: 2070-1721

S. Deering

Retired

R. Hinden

Check Point Software

July 2017

## Internet Protocol, Version 6 (IPv6) Specification

### Abstract

This document specifies version 6 of the Internet Protocol (IPv6).

**It obsoletes RFC 2460.**

Internet Engineering Task Force (IETF)  
Request for Comments: 8219  
Category: Informational  
ISSN: 2070-1721

M. Georgescu  
L. Pislaru  
RCS&RDS  
G. Lencse  
Szechenyi Istvan University  
August 2017



BMWG ☺

## Benchmarking Methodology for IPv6 Transition Technologies

### Abstract

Benchmarking methodologies that address the performance of network interconnect devices that are IPv4- or IPv6-capable exist, but the IPv6 transition technologies are outside of their scope. This document provides complementary guidelines for evaluating the performance of IPv6 transition technologies. More specifically, this document **targets IPv6 transition technologies that employ encapsulation or translation mechanisms**, as dual-stack nodes can be tested using the recommendations of RFCs 2544 and 5180. The methodology also includes a metric for benchmarking load scalability.

# The crux?

- Some transition mechanisms involve DNS64
  - => *need to take DNS into account*
  - => *happy eye ball (see later)*

Internet Engineering Task Force (IETF)  
Request for Comments: 8250  
Category: Standards Track  
ISSN: 2070-1721

N. Elkins  
Inside Products  
R. Hamilton  
Chemical Abstracts Service  
M. Ackermann  
BCBS Michigan  
September 2017

## IPv6 Performance and Diagnostic Metrics (PDM) **Destination Option**

### Abstract

To assess performance problems, this document describes optional headers embedded in each packet that provide sequence numbers and timing information as a basis for measurements. Such measurements may be interpreted in real time or after the fact. This document specifies the Performance and Diagnostic Metrics (PDM) Destination Options header. The field limits, calculations, and usage in measurement of PDM are included in this document.

# Wireshark Capture from IPPM at IETF-93

```
Frame 37: 110 bytes on wire (880 bits), 110 bytes captured (880 bits) on interface 0
Ethernet II, Src: JuniperN_f9:08:30 (84:b5:9c:f9:08:30), Dst: 04:01:68:8c:85:01 (04:01:68:8c:85:01)
Internet Protocol Version 6, Src: 2601:648:8600:6a39:7ae3:b5ff:fe7a:7886, Dst: 2604:a880:800:10::6e:1001
  0110 .... = Version: 6
  .... 0000 0000 .... = Traffic class: 0x00000000
  .... 0111 1100 0010 0110 0010 = Flowlabel: 0x0007c262
    Payload length: 56
    Next header: IPv6 destination option (60)
    Hop limit: 50
    Source: 2601:648:8600:6a39:7ae3:b5ff:fe7a:7886 (2601:648:8600:6a39:7ae3:b5ff:fe7a:7886)
    [Source SA MAC: Hewlett-7a:78:86 (78:e3:b5:7a:78:86)]
    Destination: 2604:a880:800:10::6e:1001 (2604:a880:800:10::6e:1001)
    [Source GeoIP: Unknown]
    [Destination GeoIP: Unknown]
  IPv6 Destination Option Header
    Next Option: 6
    Option Header Length: 16
  Performance and Diagnostic Metrics protocol
    Option Type: 30
    Option Payload Length: 12
    10.. .... = Time Base: nanoseconds (0x02)
    ..00 0000 0... .... = Scale of Delta Time Last Received: 0
    .... .... .000 0000 = Scale of Delta Time Last Sent: 0
    Packet Sequence Number This Packet: 31715
    Packet Sequence Number Last Received: 0
    Delta Time Last Received: 0x0000 (scaled = 0 nanoseconds)
    Delta Time Last Sent: 0x1040 (scaled = 4160 nanoseconds)
    Padding: 0000
  Transmission Control Protocol, Src Port: 61944 (61944), Dst Port: 1234 (1234), Seq: 2451907301, Len: 0
```

# Difference with draft-ietf-ippm-ioam-data

- iOAM can use IPv6 extension headers but also NSH, Segment Routing, ...
- Requires support on each router on the path
- It is also about **proving the path** with signatures



Internet Engineering Task Force (IETF)  
Request for Comments: 8273  
Category: Informational  
ISSN: 2070-1721

J. Brzozowski  
Comcast Cable  
G. Van de Velde  
Nokia  
December 2017

## Unique IPv6 Prefix per Host

### Abstract

This document outlines an approach utilizing existing IPv6 protocols to allow hosts to be assigned a unique IPv6 prefix (instead of a unique IPv6 address from a shared IPv6 prefix). Benefits of using a unique IPv6 prefix over a unique service-provider IPv6 address include improved host isolation and enhanced subscriber management on shared network segments.

# Could we even go to a /64 per host ????

- Do not panic, we have enough IPv6 addresses !
- Remove all layer-[23] threats: rogue RA & co
- This I-D is for a /64 per host but host is now aware, but, what of ?
  - For containers, the /64 can contain
    - The timestamp of instantiation
    - Father process ID
    - Image ID
    - In short, a fingerprint for audit

Request for Comments: 8305  
Obsoletes: 6555  
Category: Standards Track  
ISSN: 2070-1721

T. Pauly  
Apple Inc.  
December 2017

## **Happy Eyeballs Version 2: Better Connectivity Using Concurrency**

### Abstract

Many communication protocols operating over the modern Internet use hostnames. These often resolve to multiple IP addresses, each of which may have different performance and connectivity characteristics. Since specific addresses or address families (IPv4 or IPv6) may be blocked, broken, or sub-optimal on a network, clients that attempt multiple connections in parallel have a chance of establishing a connection more quickly. This document specifies requirements for algorithms that reduce this user-visible delay and provides an example algorithm, referred to as "Happy Eyeballs". This document obsoletes the original algorithm description in RFC 6555.

# New Happy Eyeball ?

- Mainly clarifications about
  - Multiple DNS servers
  - Multiple addresses are returned
  - 50 msec preference for IPv6
- Simple new implementation is compatible with 'old' version

Independent Submission  
Request for Comments: 8367  
Category: Informational  
ISSN: 2070-1721



## **Wrongful Termination of Internet Protocol (IP) Packets**

### Abstract

Routers and middleboxes terminate packets for various reasons. In some cases, these packets are wrongfully terminated. This memo describes some of the most common scenarios of wrongful termination of Internet Protocol (IP) packets and presents recommendations for mitigating them.

# April Fools' Day RFC

- Packet can be terminated based on
  - Color : DSCP
  - Age: Hop Limit
  - Origin: source address
  - ...

Internet Engineering Task Force (IETF)  
Request for Comments: 8415  
Obsoletes: 3315, 3633, 3736, 4242, 7083,  
7283, 7550  
Category: Standards Track  
ISSN: 2070-1721

T. Mrugalski  
M. Siodelski  
ISC  
B. Volz  
A. Yourtchenko  
Cisco  
M. Richardson  
SSW  
S. Jiang  
Huawei  
T. Lemon  
Nibbhaya Consulting  
T. Winters  
UNH-IOL  
November 2018

## **Dynamic Host Configuration Protocol for IPv6 (DHCPv6)**

# Huw? New DHCPv6 ???

- No... unique DUID is unchanged
- No... DHCPv6 still leases address(es) to DUID and not to client-HW-address
  - Sorry, security guy / controlling freaks
- It is about clarifications mainly
  - And removing client hints



Internet Engineering Task Force (IETF)  
Request for Comments: 8475  
Category: Informational  
ISSN: 2070-1721

J. Linkova  
Google  
M. Stucchi  
RIPE NCC  
October 2018


## **Using Conditional Router Advertisements for Enterprise Multihoming**

### Abstract

This document discusses the most common scenarios of connecting an enterprise network to multiple ISPs using an address space assigned by an ISP and how the approach proposed in "Enterprise Multihoming using Provider-Assigned Addresses without Network Prefix Translation: Requirements and Solution" could be applied in those scenarios. The problem of enterprise multihoming without address translation of any form has not been solved yet as it requires both the network to select the correct egress ISP based on the packet source address and hosts to select the correct source address based ...

# Selecting the Uplink

- Two uplinks used for Internet access (primary/backup or active/active)
- Simple network topology
- Each ISP allocates a prefix
- Packets **SHOULD NOT** be sent to the uplink if
  - It's backup uplink and the primary one is up
  - The packet source address does not belong to that ISP

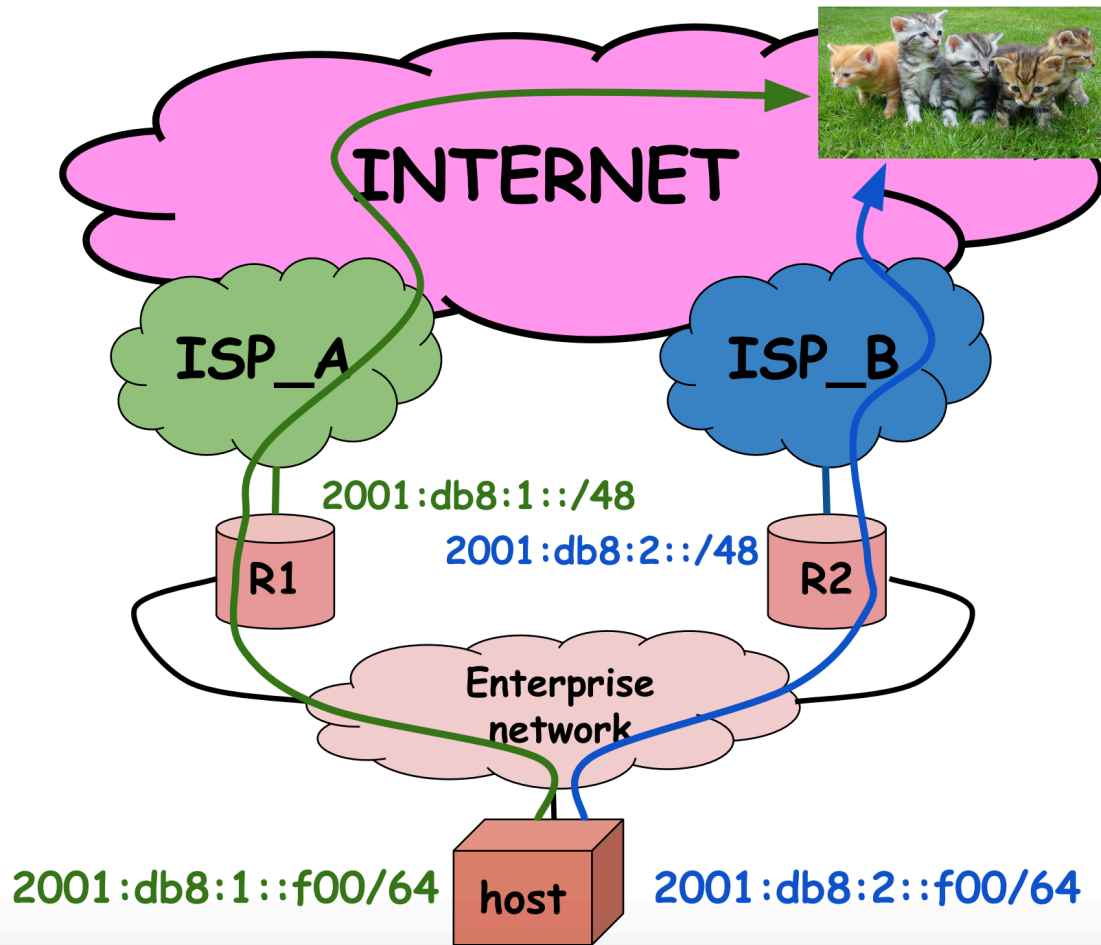

# Influencing the Source Address Selection

If the primary uplink is operational

Address from the backup prefix **SHOULD NOT** be used

If the ISP uplink fails


Addresses from that ISP prefix **SHOULD NOT** be used

**deprecate the address**



# Proposed Approach

RA fields values are set based on the present network state  
("conditionally")

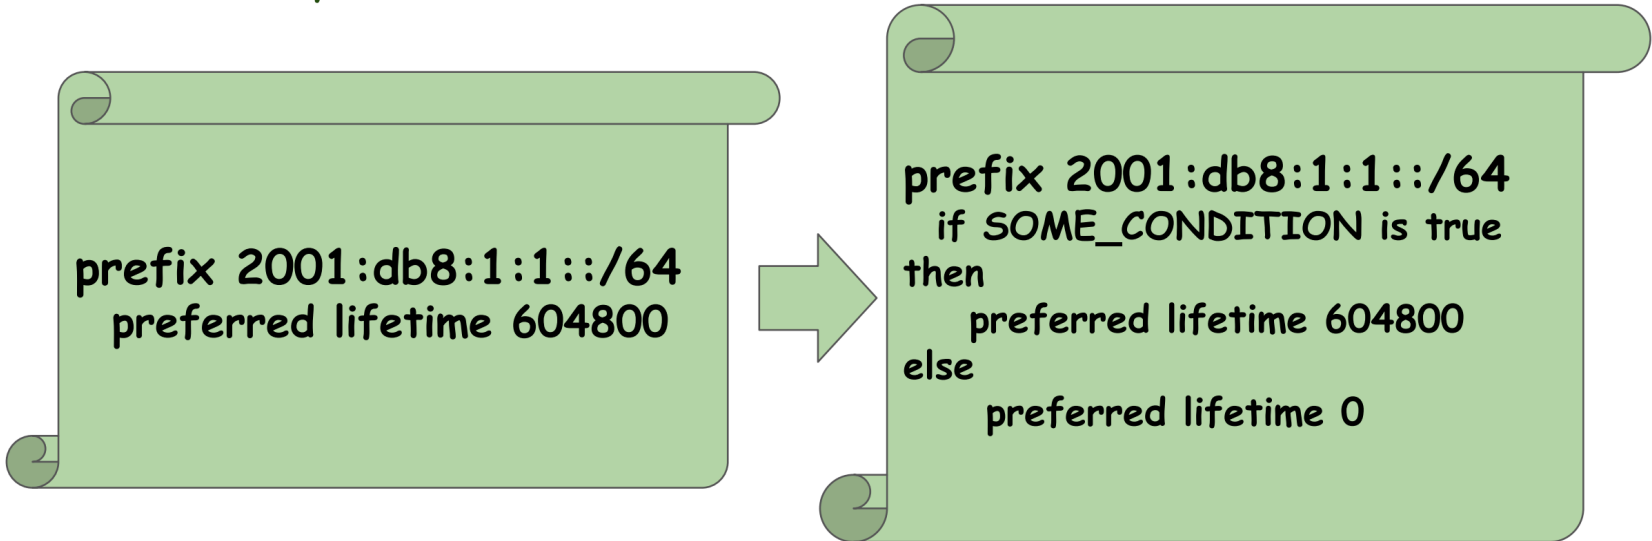

```
prefix 2001:db8:1:1::/64
preferred lifetime 604800
```

```
prefix 2001:db8:1:1::/64
  if SOME_CONDITION is true
  then
    preferred lifetime 604800
  else
    preferred lifetime 0
```

Internet Engineering Task Force (IETF)  
Request for Comments: 8501  
Category: Informational  
ISSN: 2070-1721

L. Howard  
Retevia  
November 2018

## **Reverse DNS in IPv6 for Internet Service Providers**

### Abstract

In IPv4, Internet Service Providers (ISPs) commonly provide IN-ADDR.ARPA information for their customers by prepopulating the zone with one PTR record for every available address. This practice **does not scale in IPv6**. This document analyzes different approaches and considerations for ISPs in managing the IP6.ARPA zone.

# How to make reverse DNS scale ?

- Such as
  - `a.9.8.7.6.5.e.f.f.f.4.3.2.1.0.0.0.0.0.0.0.f.0.8.b.d.0.1.0.0.2 .IP6.ARPA.`
- Proposals
  - Negative response NXDOMAIN
  - Wildcard match
  - Dynamic DNS update (but not so scalable)
    - By residential gateway (managed or not)
    - By individual nodes
  - DNS delegation
  - Populate from DHCP/RADIUS server ?

Internet Engineering Task Force (IETF)  
Request for Comments: 8504  
BCP: 220

T. Chown  
Jisc  
J. Loughney  
Intel  
T. Winters  
UNH-IOL  
January 2019

**Obsoletes: 6434**

Category: Best Current Practice  
ISSN: 2070-1721

## IPv6 Node Requirements

### Abstract

This document defines requirements for IPv6 nodes. *It is expected that IPv6 will be deployed in a wide range of devices and situations.* Specifying the requirements for IPv6 nodes allows IPv6 to function well and interoperate in a large number of situations and deployments.

This document obsoletes RFC 6434, and in turn RFC 4294.




# Meta-RFC 8504 roadmap to all RFC and recommendations

- Not all RFC need to be implemented all the time ;-)
- Beware of fragmentation (done by the source, ICMP required, extension header, ...)
- Source address selection
- Mandatory SLAAC, optional DHCP
- ...

# Changes in RFC 8504

- DNS over RA is mandatory
- Adding RESTCONF, NETCONF for management
- And new features such as ECN, mDNS, unique prefix per host, ...
- Stable address creation RFC 8064
- Removed IPv6 over ATM ;-)



# Recent IPv6 Internet Drafts

*More than 300 active I-D have IPv6 references*

Network Working Group  
Internet-Draft  
Updates: 4861, 5175 (if approved)  
Intended status: Standards Track  
Expires: September 8, 2019

R. Hinden  
Check Point Software  
B. Carpenter  
Univ. of Auckland  
B. Zeeb  
March 7, 2019


## **IPv6 Router Advertisement IPv6-Only Flag**

draft-ietf-6man-ipv6only-flag-05

### Abstract

This document specifies a Router Advertisement Flag to indicate to hosts that the administrator has configured the router to advertise that the link is IPv6-Only. This document updates RFC4861 and RFC5175.

# Why ?

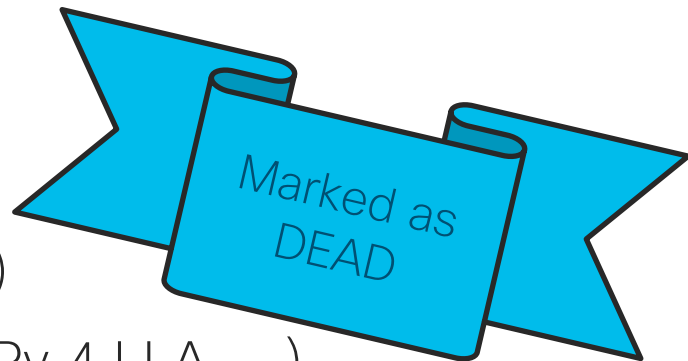


- IPv6-only network is doable (with caveats)
- But, hosts still want to try IPv4 (DHCPv4, IPv 4 LLA, ...)
- Flag in RA can signal IPv6-only => avoiding IPv4 startup
- Obviously cannot be done over DHCPv4
  - Assuming IPv6-only host stack
- Yet another RA flags though... Exhaustion is coming !

# Multi-Homing, the legacy way...

## WARNING

This slide has strong and offensive wording: the N word...

BE WARNED

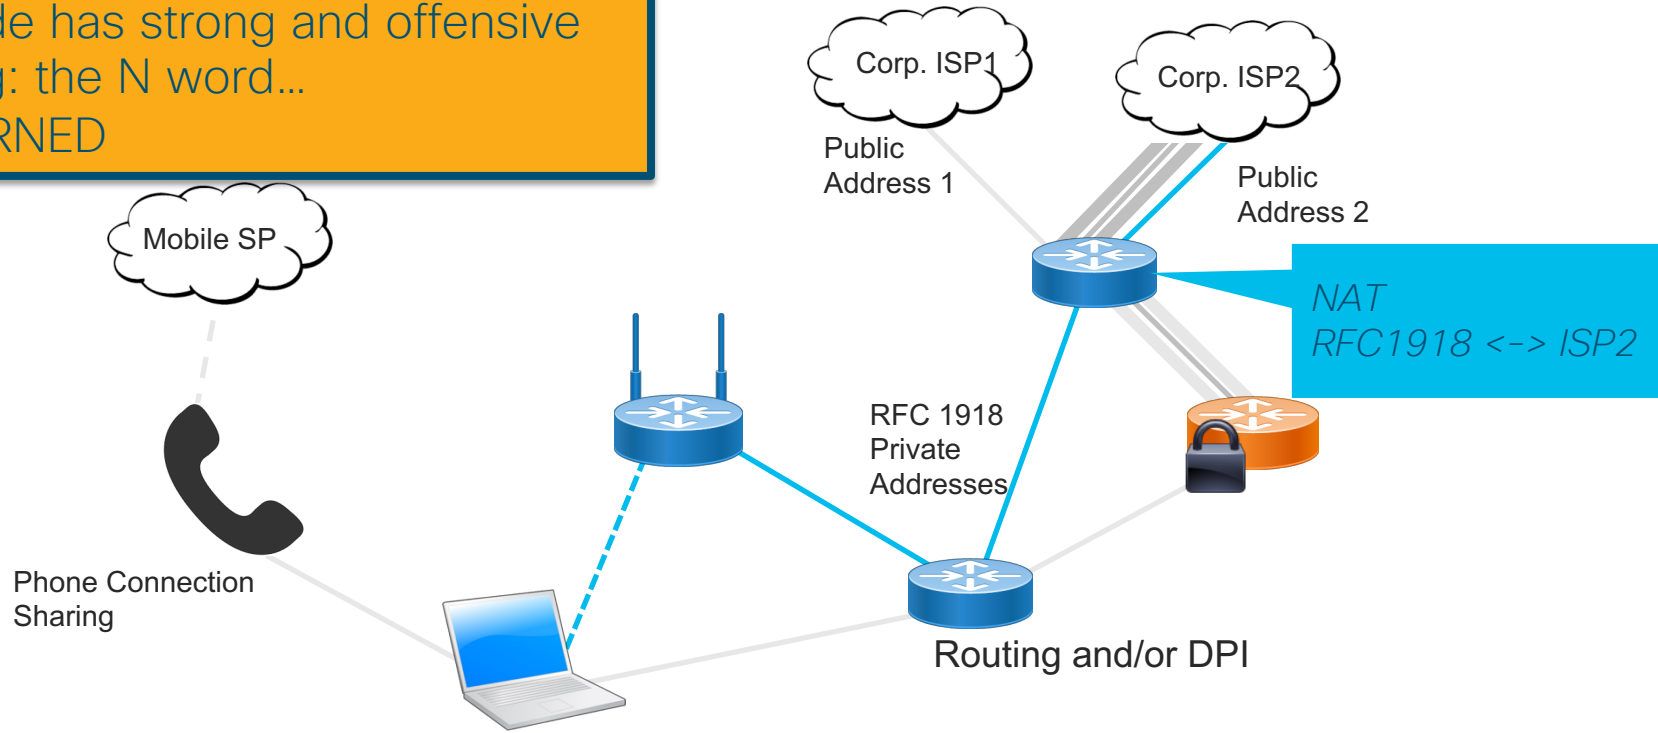

rtgwg  
Internet-Draft  
Intended status: Standards Track  
Expires: September 11, 2019

D. Lamparter  
NetDEF  
A. Smirnov  
Cisco Systems, Inc.  
March 10, 2019

**Destination/Source Routing**  
draft-ietf-rtgwg-dst-src-routing-07

Abstract

This note specifies using packets' source addresses in route lookups as additional qualifier to be used in hop-by-hop routing decisions.

**This applies to IPv6** [RFC2460] in general with specific considerations for routing protocol left for separate documents.

*There is nothing precluding similar operation in IPv4, but this is not in scope of this document.*

Note that destination/source routing, source/destination routing, SADR, source-specific routing, source-sensitive routing, S/D routing and D/S routing are all used synonymously.

# SADR in a nutshell

- All FIB entries are associated with a source prefix
  - `::/0` for entries without a source prefix
- `draft-ietf-rtgwg-dst-src-routing`
- Find route matching both source and destination prefixes while preferring longest destination prefix match and breaking ties with longest source prefix match
- Not optimal SADR algorithm
  1. `PotentialRoutes := Longest match(es) on destination prefix`
  2. `SourceRoute := longest match on the packet source in the PotentialRoutes`
  3. If not found, then back to 1) with a shorter match
- Other implementations are possible



# Trivial SADR Example


- SADR FIB

Source	Destination	Next - Hop
::/0	::/0	R3
2001:db8::/32	::/0	R3
2001:db8:2::/64	::/0	R4

- Packet SRC = 2001:db8:1::1 to DST = 2001:db8:cafe::babe via R3
- Packet SRC = 2001:db8:2::1 to DST = 2001:db8:cafe::babe via R4

# Incremental Deployment

- SADR **only** on edge routers
- Best effort forwarding:
  - R3 can have a SADR route to R4 for ISP2 source prefix
- SADR on R1 / R6 would only improve
- If R3 and R4 are not adjacent, then SRv6 (or a tunnel) can be used

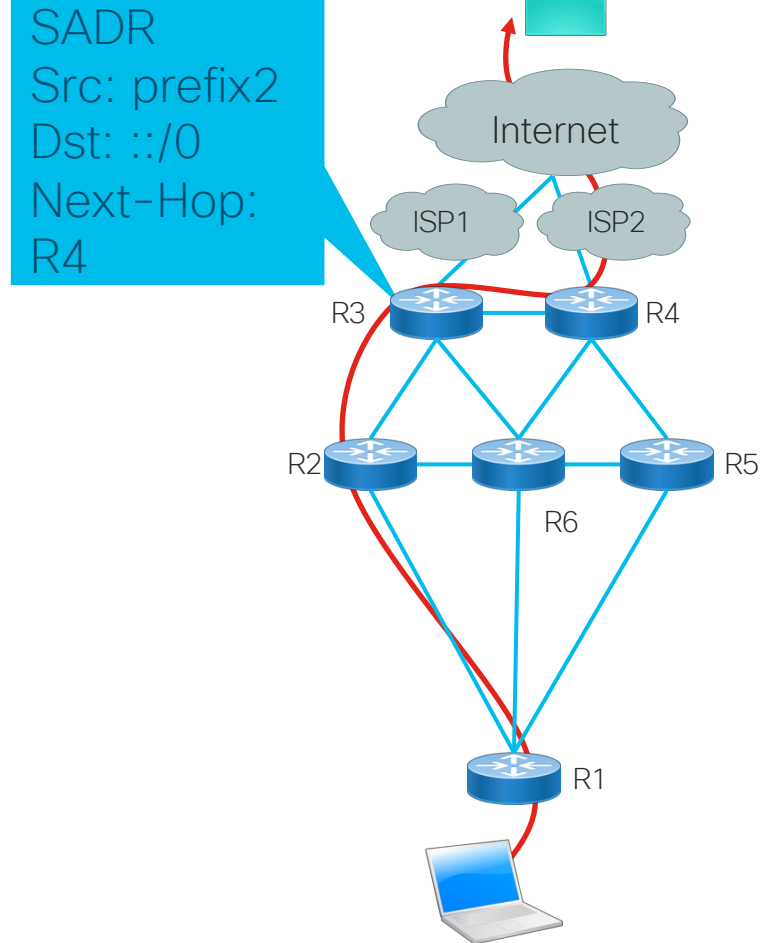

# draft-ietf-intarea-provisioning-domains

## 1. Identify Provisioning Domains (PvDs)

*[RFC7556] Provisioning Domains (PvDs) are consistent sets of network properties that can be implicit, or advertised explicitly.*


Differentiate provisioning domains by using FQDN identifiers.

## 2. Extend PvD with additional information

For the applications: name, captive portal, etc...

# Identify PvDs

## With the PvD ID Router Advertisement Option

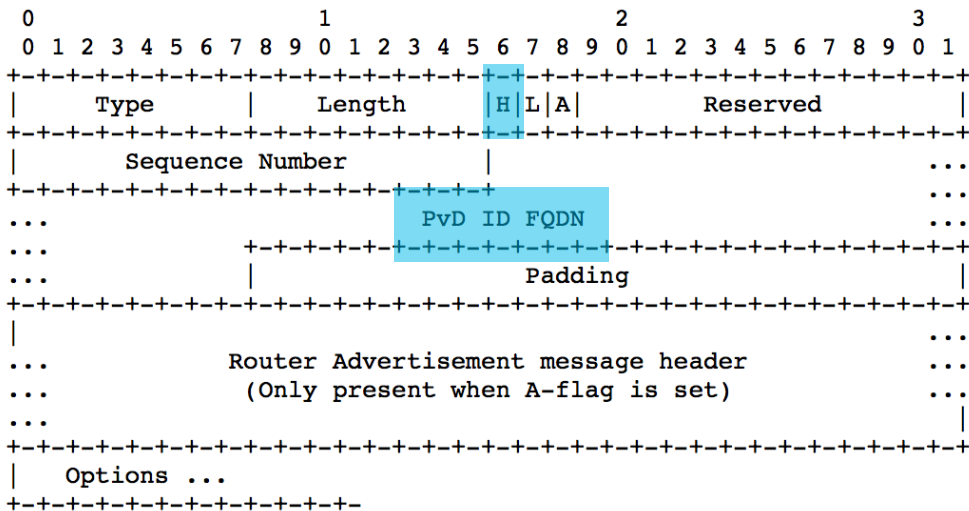

- At most **one occurrence in each RA**.
- **PvD ID is an FQDN** associated with options included in the PvD option.
- **H bit** to indicate **Additional Information is available with HTTPS**.
- **L bit** to indicate the **PvD has legacy DHCP on the link**.
- **A bit** to indicate that another RA header is included in the container
- Seq. number used for **push-based refresh**.

Network Working Group  
Internet-Draft  
Intended status: Experimental  
Expires: July 1, 2019

O. Troan  
Cisco Systems  
December 28, 2018

**The Universal IPv6 Router Advertisement Option (experiment)**  
draft-troan-6man-universal-ra-option-01

Abstract

One of the original intentions for the IPv6 host configuration, was to configure the network-layer parameters only with IPv6 ND, and use service discovery for other configuration information. Unfortunately that hasn't panned out quite as planned, and we are in a situation where all kinds of configuration options are added to RAs and DHCP. This document proposes a new universal RA option in a self-describing data format, with the list of elements maintained in an IANA registry, with greatly relaxed rules for registration.

# Universal RA option ?

- Opaque carrier for self-describing configuration options
- Allow for communication network -> host applications

0	1	2	3	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	
+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+
Type			Length			Data																														
+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+

- Encoding as JSON

# Example of Universal RA Option

```
{ "ietf": {  
    "dns": {  
        "dnssl": [ "example.com" ],  
        "rdnss": [ "2001:db8::1",  
                   "2001:db8::2" ]  
    },  
    "nat64": {  
        "prefix": "64:ff9b::/96"  
    }  
}
```

# About security

OPSEC

Internet-Draft

Intended status: Informational

Expires: September 12, 2019

E. Vyncke, Ed.

Cisco

K. Chittimaneni

WeWork

M. Kaeo

Double Shot Security

E. Rey

ERNW

March 11, 2019

**Operational Security Considerations for IPv6 Networks**  
**draft-ietf-opsec-v6-16**

<https://tools.ietf.org/html/draft-ietf-opsec-v6-16>



# OPSECv6

- A long long time ago, it all started
- Focus on enterprise, SP and residential
  - A touch of 3GPP
  - Nothing about IoT
- Topics: addressing, extension headers, NDP, ...
- Just “considerations” to be easier at the IETF
  - Still very hot about ULA...

## See also

- IP Fragmentation Considered Fragile: draft-ietf-intarea-frag-fragile-09
- IKEv2 Notification Status Types for IPv4/IPv6 Coexistence: draft-ietf-ipsecme-ipv6-ipv4-codes-02
- Recommendations on the Filtering of IPv6 Packets Containing IPv6 Extension Headers: draft-ietf-opsec-ipv6-eh-filtering-06
- ...

# Thank you

- For listening
- But also to ACT

- IETF is not about superpower of Gods
- It is about engineering mainly (and vendor politics sometime)
- Decisions are made on MAILING LIST
  - Free
  - You are an individual and not an employee/student
  - No NEED to be in physical meetings